

1966 CHEVELLE

Two panel Sequential LED Taillight kit installation guide

Kit Contents:


- **2** LED panels
- **2** rubber grommets
- **1** power wire with t-tap
- **1** driver side LED harness, 24"
- **1** passenger side LED harness, 48"
- **2** LED extension harnesses, 12"
- **1** harness crimp kit
- **1** mounting hardware kit

PN 1100466

Note

The LED boards are shipped with the slide switch set to Sequential mode. We recommend that all slide switches be set to the same setting (either standard or sequential).

Please follow all local laws concerning exterior lighting.

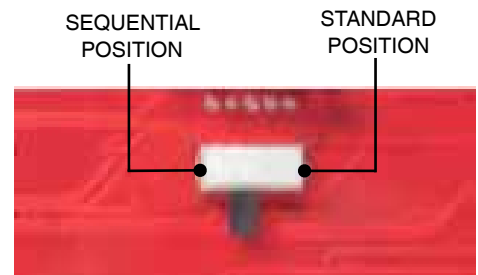

Shown in sequential mode

Hint

You may begin with the LED panel installation, however, you will need to complete the wiring modifications before the LED panels and housings are paired as one. Read over the entire instruction guide to determine the method that works best for you.

LED PANEL INSTALLATION

1. Cut off the power to your car.

Disconnect the negative terminal from the battery to cut off the power in your car.

2. Remove and disassemble your taillights.

Turn the light sockets counter-clockwise to remove them from the tail light housings. As a safety precaution, remove the bulbs from the sockets. Put them aside since they will no longer be needed. Remove the taillight housing assembly from the car.

3. Identify the LED panels.

Each LED panel marked on its backside, which identifies where each respective LED panel is to be mounted. As example, shown below is the **PASSENGER (RIGHT)** panel.



4. Fasten mounting screws.

Feed the long machine screws through the front of the LED panel. Use the nuts to secure it them.



Note

Be careful not to scratch into the LED panel with the screwdriver.


5. Plug in extension wires, grommets.

Feed the extension wires through the socket hole. Wrap the rubber grommet around the wires and press it into the socket hole. Once the LED panels are in place for good, you will still be able to easily plug and unplug the harness and remove the buckets.

Plug the grommets into the socket hole.

6. Mount the LED panels.

When mounting the LED panels, make sure they sit flat and parallel within the housing. Use the rest of the mounting hardware to secure the LED panels into the housings.

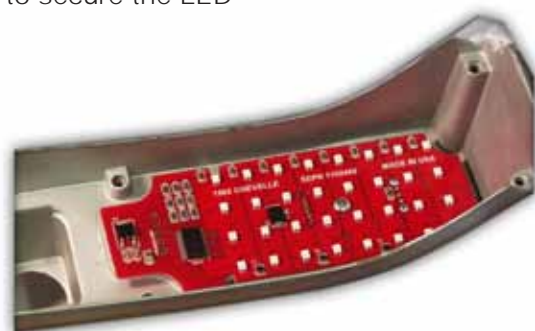

1. Plug the extension harness into the LED panel.



2. While positioning the LED panel into place, feed the screws through the center holes in the grommets.

The wires will sit alongside the studs.



3. Place the slotted washer on top of the grommet.



4. Place the white washer on top of the slotted washer.



5. Tighten snug with the black wing nut.

Important Note

DO NOT OVER TIGHTEN THE WING NUT! Make sure that the LED panel is not bending in from too much tightening force. You may want to use Loctite or silicone to make to be sure the wing nut stays secure.

1. Review the wiring diagrams found on the last page.









Each LED panel needs five connections. Listed are the LED harness colors and their respective function. Note: Depending on make and harness, colors may not match.

- ORANGE** - Constant 12 volt power source.
- BLACK** - Grounded to body.
- YELLOW** - Driver side turn signal.
- GREEN** - Passenger side turn signal.
- BROWN** - Running/park signal.

2. Find and access the taillight wires.

Pick a point in the rear body panel between the driver’s side quarter panel and the driver’s side taillight housing assembly and remove the cloth tape to expose the taillight wires.

3. Splice the LED SIGNAL wires into the stock SIGNAL wires. Match the LED harness to the corresponding stock harness as shown below.

LED Harness	Function	Stock harness	Notes
 Green	Passenger side turn signal/ Brake light signal	 Green	The light socket ends on the car harness can be removed.
 Yellow	Driver side turn signal/ Brake light signal	 Yellow	The light socket ends on the car harness can be removed.
 Brown	Running/Park signal	 Brown	
 Orange	Constant 12 volt		Find power at fuse panel/trunk light/dome light/fused battery feed.
 Black	Ground		Ground to Body/chassis

Note about brake lights

There is no dedicated Brake light signal wire. When the brake pedal is pressed the brake switch sends power into the turn signal switch and then power through both the driver and passenger signal wires to activate the brake lights.

4. Connect all the ground wires.

Connect all the ground wires together. Bolt them to the trunk latch support along with the original rear body harness ground. The ground connection must be good in order to the operate the LED tail lights.

5. Supply the LED panel harnesses with a constant 12 volt feed using the included **Orange** power wire and T-Tap.

An Orange power wire is supplied along with a T-Tap. The orange power wire must be powered with a constant 12 volt battery supply for the LED circuitry to operate properly. You can use the included T-Tap connector to splice to a constant power source, like the dome light, trunk light, fuse box, etc.

Splice the T-Tap connector over the constant power source, then plug the orange wire into the T-Tap. The other end of the orange power wire is tied in with the orange wires of all the LED panel harnesses.



1. Insert wire into T-Tap



2. Crimp with pliers



3. Plug connector into T-Tap

6. Tuck and secure the spliced wires.

Take the spliced sections and fold them over to one side and tape them in place. This will allow you to place the wiring into loom or wrap the LED panel wiring tightly away.



1. Fold wires to one side.



2. Secure with electrical tape.

Note

A wire diagram of the LED panel's harness spliced into the car's stock harness is on the last page.

Note

The LED light kits are designed for best performance when use an electronic no-load flasher. Shown here is an optional electronic no load flasher available from DIGI-TAILS, (PN 20-F2)



If you decide to use a stock bi-metal flasher, we recommend a standard-duty flasher instead of a heavy-duty flasher. If your turn signal circuit includes front and rear LED turn signals, the circuit will not have enough resistance load to operate a heavy-duty bi-metal flasher, so the no-load flasher will be required for both the turn signal and emergency flashers.

